PUMPER, PUC

BODY
Pumper, PUC, Aluminum

CHASSIS
Enforcer Chassis, PUC

ELECTRICAL SYSTEM
MUX

CHASSIS

AXLE,FRONT,CUSTOM
19,500 Lb TAK-4 Axle

AXLE,REAR
27,000 Lb Meritor Axle

ENGINE
510 HP Paccar MX13 Engine

TRANSMISSION
ALlison 6th Gen, 4000 EVS P

BUMPER
19" Extended Painted Steel

CAB
7010 Enforcer Cab, PUC

BODY

TOTAL TANK CAPACITY
750 Gallon Low Hose Bed Poly Tank

WATER CAPACITY
730 Gallons of Water

FOAM CELL CAPACITY
20 Gallon Foam Cell

COMPT,PUMPER,REAR
33.50" FF RolLup Rear Compt w/Tailboard, PUC

COMPT,PUMPER,LEFT SIDE
189" RolLup FuLL Height & Depth Front & Rear, PUC

COMPT,PUMPER,RIGHT SIDE
189" RolLup FuLL Height & Depth Front & Rear, PUC

FIRE SUPPRESSION

PUMPHOUSE
Control Zone, PUC

PUMP
2000 GPM Pierce PUC


CROSSLAYS,1.50"
(2) 1.50", Poly Trays, 200'


CROSSLAYS,2.50"
(1) 2.50", Poly Tray, 200'


SPEEDLAYS

GENERATOR
Generator Not Required


FOAM SYSTEM
Husky 3 Single Agent Foam System

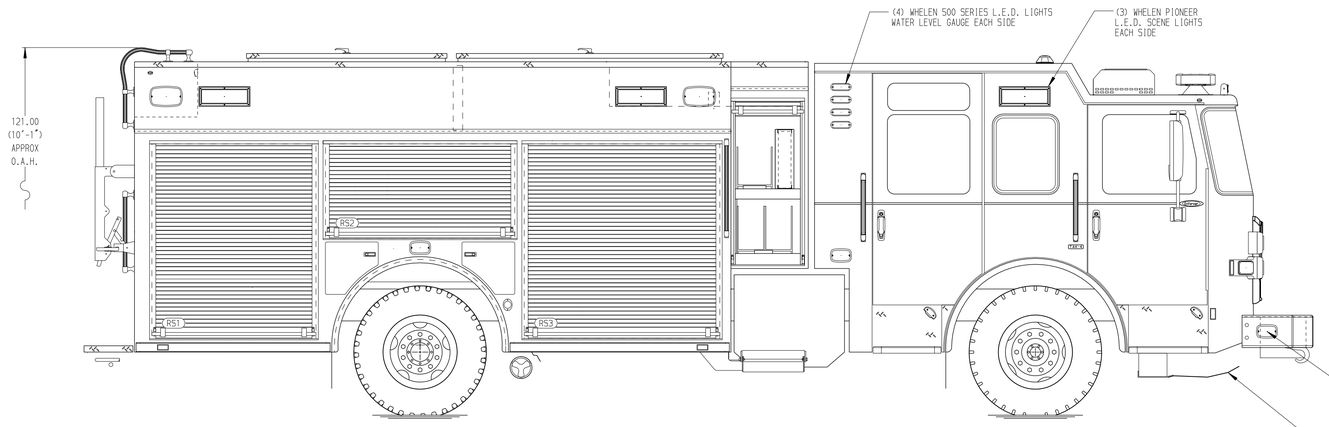


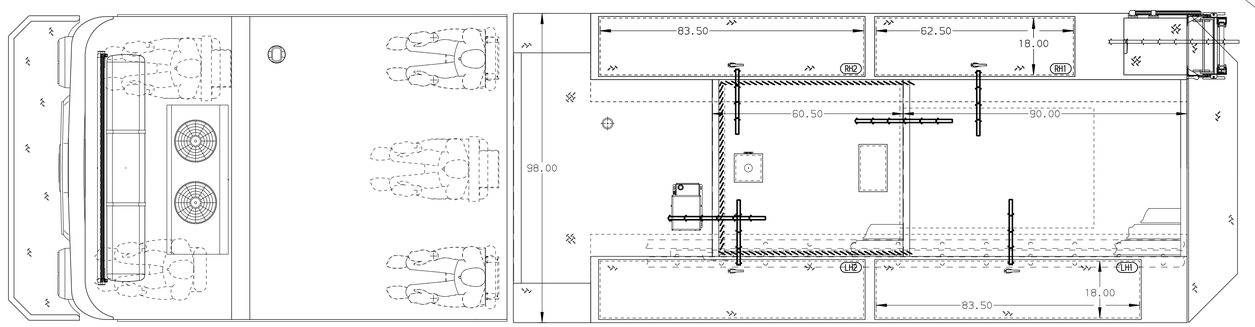

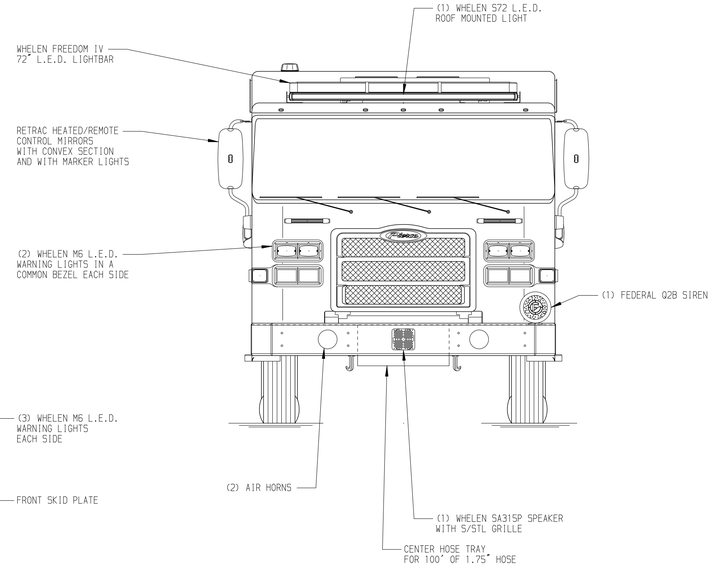

HOSEBED CAPACITIES
1. 1000' OF 5.00" D.J. HOSE
2. 600' OF 2.50" D.J. HOSE

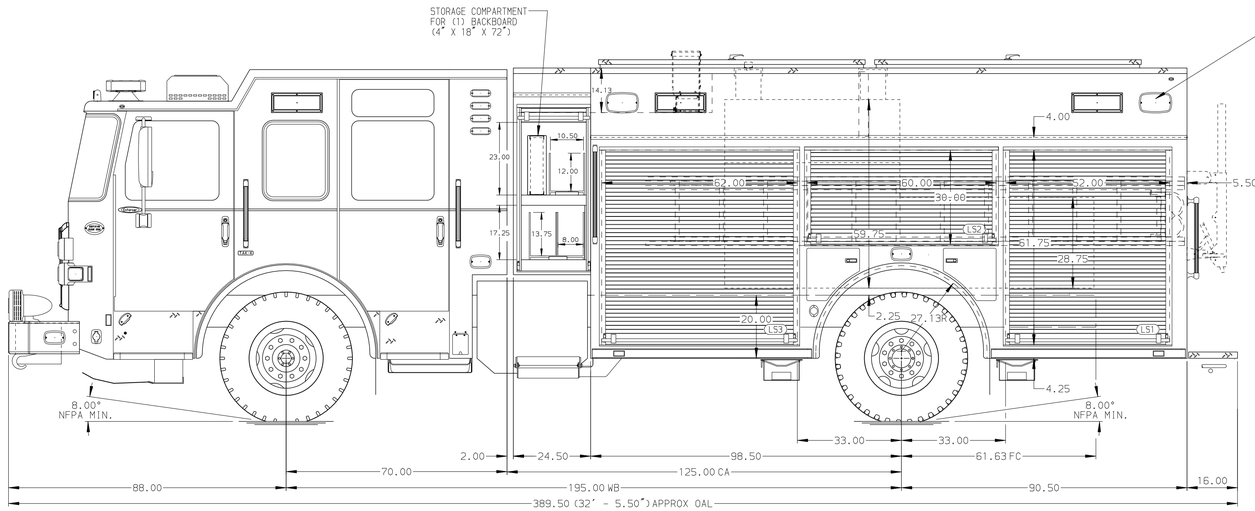

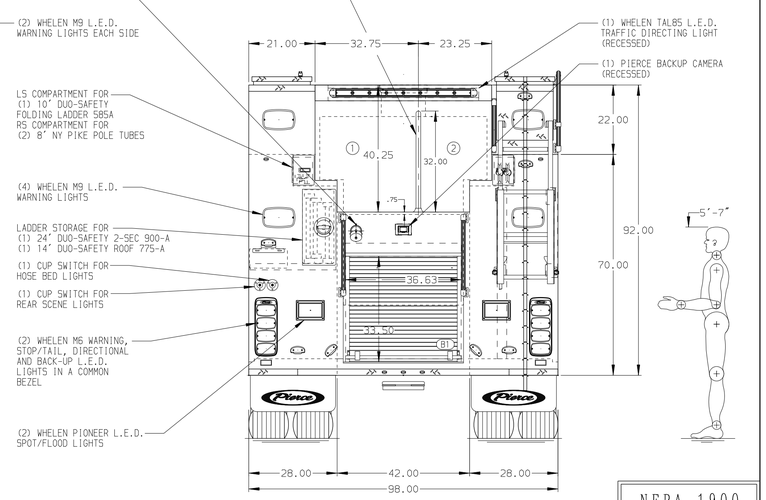

NFPA 1900 (2024) COMPLIANT

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

PIERCE MANUFACTURING INC.

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE FRONT CAB CORNER
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED PER ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT RISER
6. ADJUSTABLE SHELVES LOCATED PER ORDER
7. FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
8. SWING-OUT TOOLBOARDS LOCATED PER ORDER
9. PARTITION BETWEEN LS1/B1 AND RS1/B1

REV	DATE	BY	CH
▽	-	-	-

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

TITLE	Pierce Puc Pumper Approval Drawing
	-
FOR	Dealer Allocated Stock Unit 1
	-
DWG NO.	46540AD

JOB NO.	46540
SCALE	1:24
DATE	
DRAWN BY	DLH 11SEP26
CHECKED BY	AST 11SEP26
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 11-SEP-2026 11:31:31